




MOUNTING REFERENCE GUIDE

Dual Display Mount

CIM Cable Integrated Mounting System

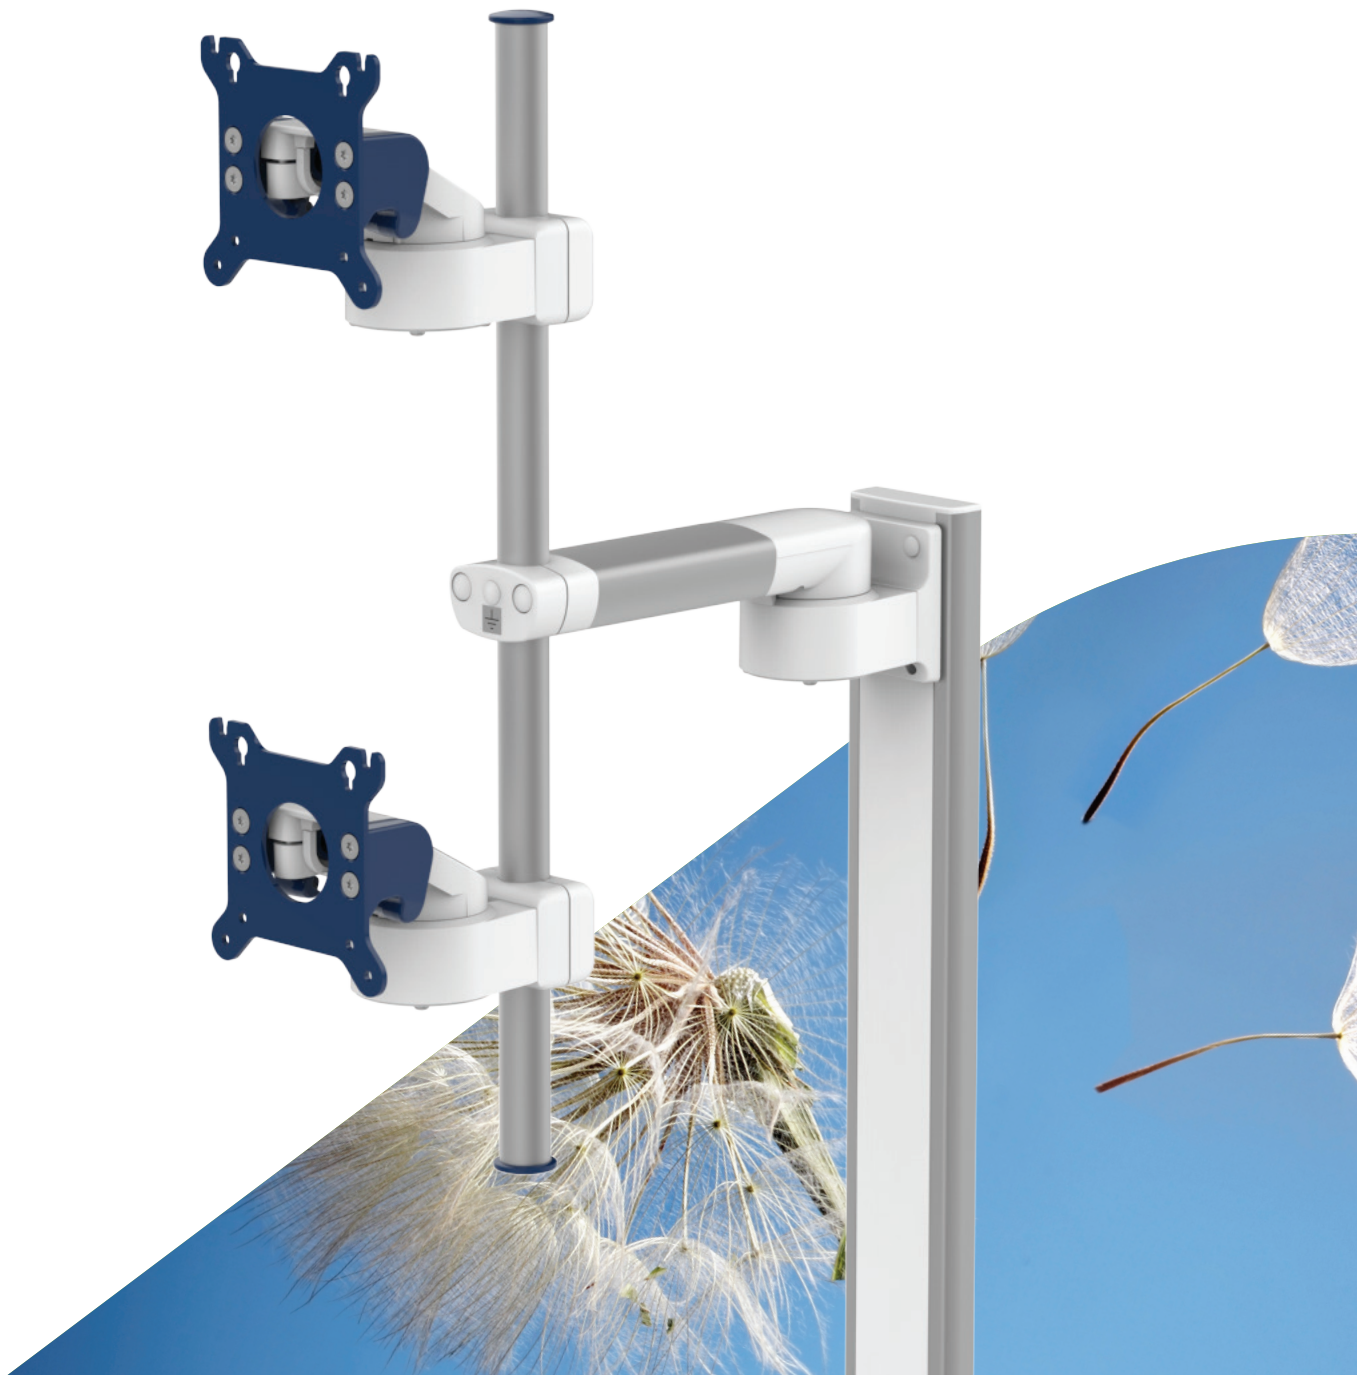

How to create part numbers

Part numbers can be easily created by following the steps below:

Please replace the letters in **green** with the part no. code as per your requirements.

1. Specify where you want to mount the arm and select the fixing (Y):

1V	=	pole ø 23 - 40 mm / 0.9 - 1.6"
1	=	pole ø 25 mm / 1.0"
1B	=	pole ø 30 mm / 1.2"
1F	=	pole ø 35 mm / 1.4"
1C	=	pole ø 38 mm / 1.5"
3	=	vertical rail 10 x 25 mm
4S	=	vertical wall channel

2. Choose the colour requested for decorative parts (C):

gr	=	RAL 7024 (graphite grey)
bl	=	RAL 5013 (cobalt blue)


3. Choose the colour requested for the aluminium die-cast parts (D):

1	=	RAL 9016 (traffic white)
2	=	RAL 9002 (grey white)

Example

Grounding		Arm version		01 Fixing		02 & 03 Colour
A	-	U224G	-	Y	.	CD
A	-	U224G	-	4S	.	gr1

Dual display column mount - side by side

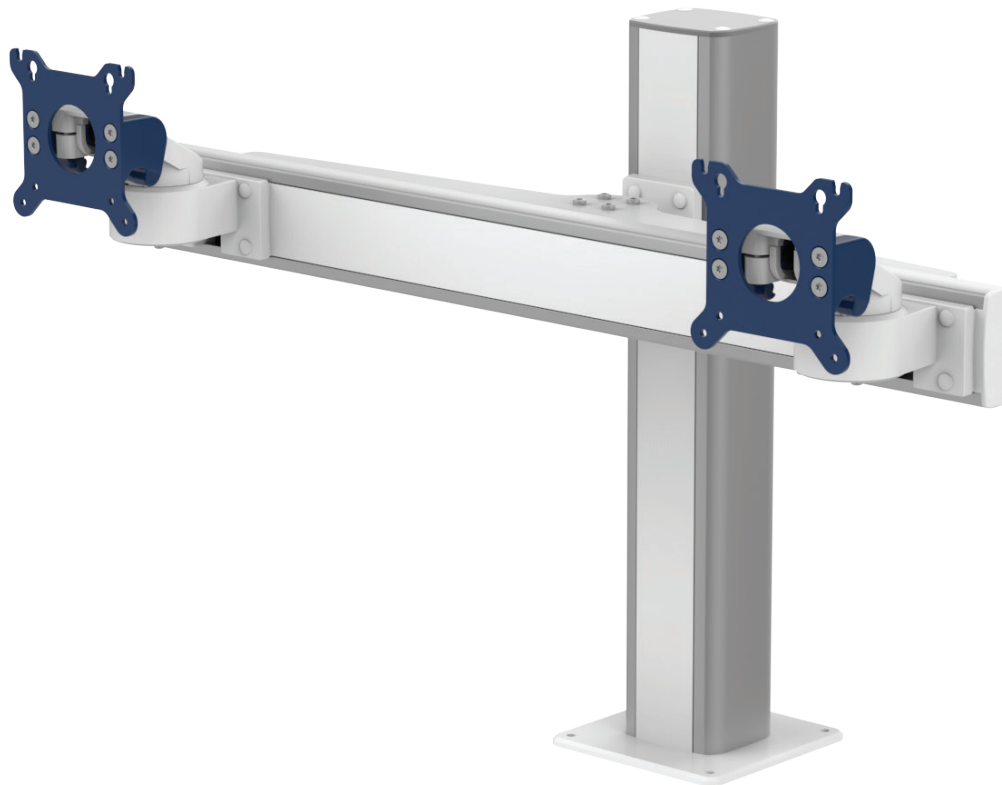

Configuration shown below consists of:

Part No.

Horizontal channel with two flush mounts

A-D908G-4S.**CD**

Monitor adaption: VESA 75/100 with tilt / swivel function

Maximum monitor weight: 16 kg / 35.3 lbs on each side

Adapter for vertical wall channel

Table and floor column


T-CTP-60.w_500

height 500 mm/ 19.7"


Dual display column mount - side by side

Technical data


FRONT VIEW

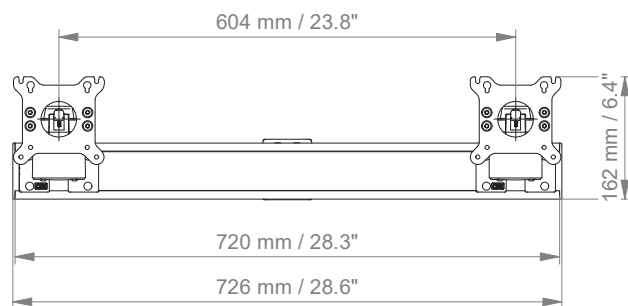

TOP VIEW

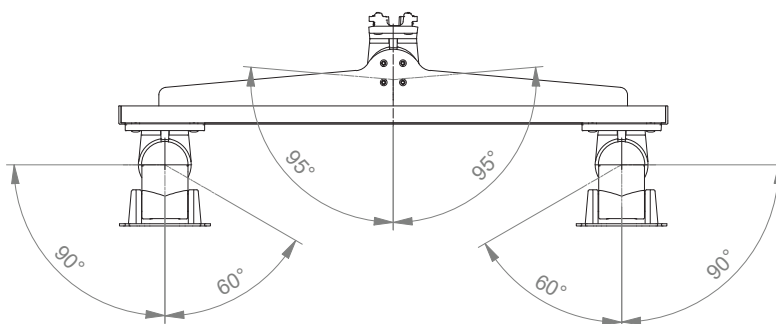

SIDE VIEW

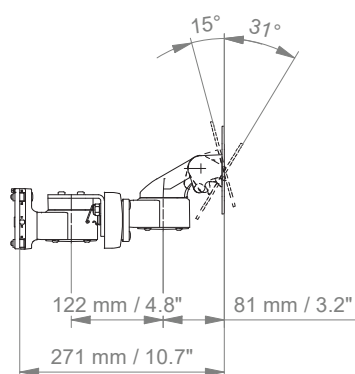

Vertically stacked dual display mount



Configuration shown below consists of:

Part No.

Support arm pivot, arm length 195 mm / 7.7"

A-U224G-Y.CD

Pole 550 mm / 21.7" length, ø 25 mm/ 1.0" with two flush mounts

Monitor adaption: VESA 75/100 with tilt / swivel function


Maximum monitor weight: 10 kg / 22.1 lbs on each flush mount

Fixings: page 7


Vertically stacked dual display mount

Technical data

SIDE VIEW

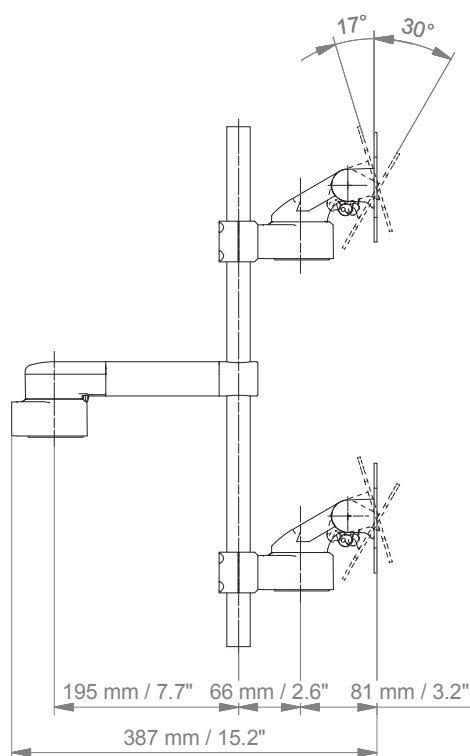



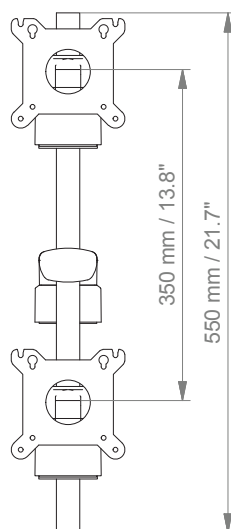

FRONT VIEW



Fixings



Illustration	Description	Notes	Weight	Part no.
	Adapter for vertical wall channel	To mount to CIM wall channel (compatible with GCX channel) Please order separately: CIM wall channel, see catalogue accessoires	0.6 kg / 1.3 lbs	4S
	Vertical rail clamp	To mount to vertical European rail 10 x 25 mm	0.5 kg / 1.1 lbs	3
	Universal pole clamp	V-block to mount to pole \varnothing 23 - 40 mm / 0.9 - 1.6"	0.6 kg / 1.3 lbs	1V
	Fixed pole clamp	To mount to pole \varnothing 25 mm / 1.0" To mount to pole \varnothing 30 mm / 1.2" To mount to pole \varnothing 35 mm / 1.4" To mount to pole \varnothing 38 mm / 1.5"	0.3 kg / 0.7 lbs 0.4 kg / 0.9 lbs 0.4 kg / 0.9 lbs 0.4 kg / 0.9 lbs	1 1B 1F 1C



CIM med GmbH

Euro-Industriepark
Margot-Kalinke-Str. 9
80939 Munich / Germany

T +49 89. 978 94 08-0
F +49 89. 978 94 08-29
M info@cim-med.com

www.cim-med.com

