


VIEWMEDIC INFOBAR

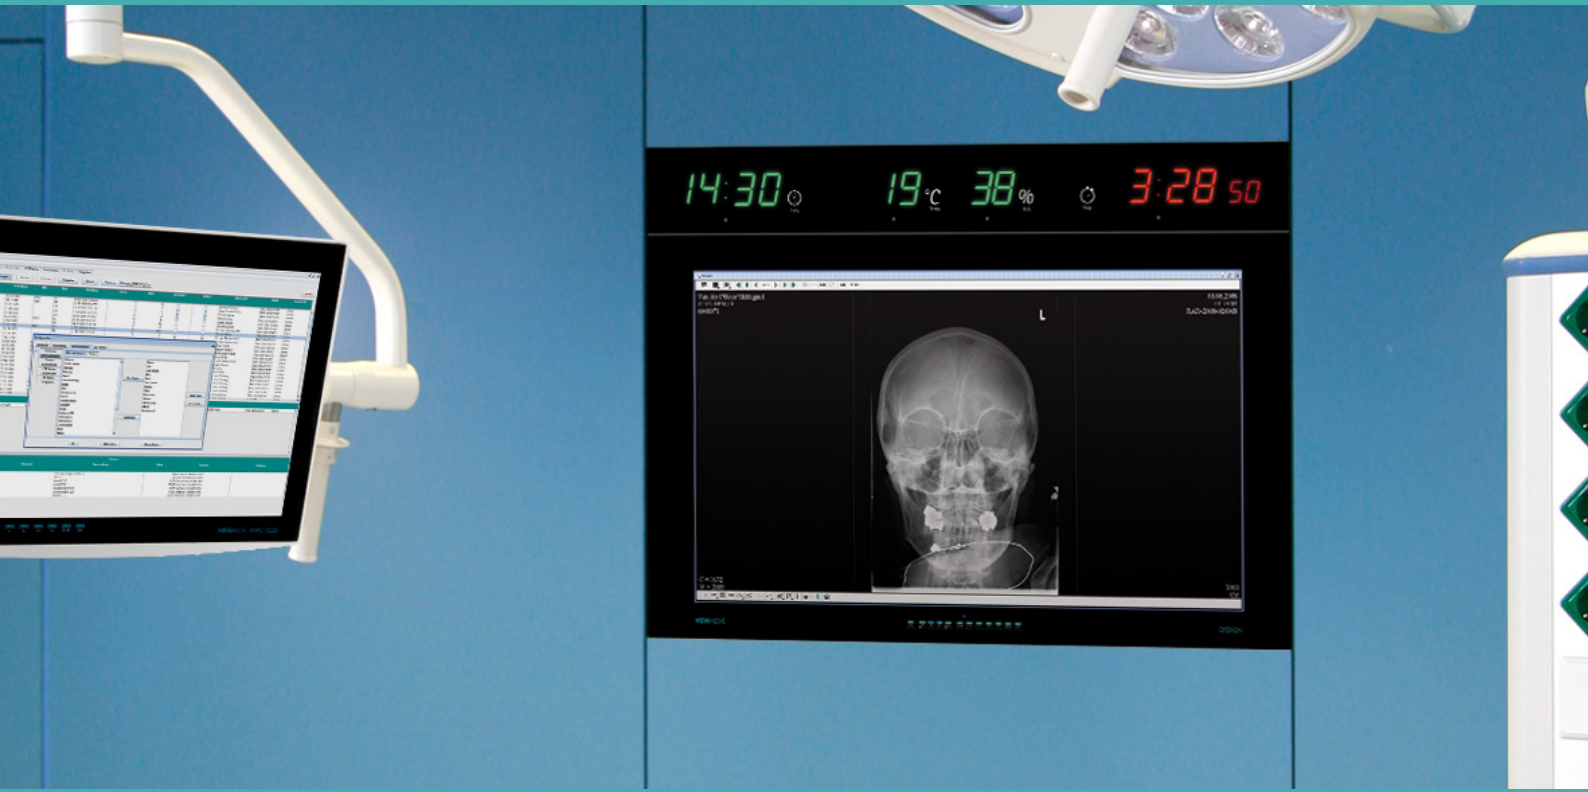

ONE DEVICE FOR
TIME, STOP WATCH, TEMP. AND HUMIDITY
INSIDE OPERION AND MODULAR WALLS

THE INFOBAR

Displays an always precise time - synchronized in various ways.



Shows temperature and humidity - lossless transmitted.



Stop the time - precise to the second.



14:30 19°C 38% 3:28 50



The INFOBAR is installable flush mounted above an OPERION system. Alternatively it is mountable at any other place in the OR wall, e.g. above a door.



Control the stop watch intuitive with two colorized buttons.



FUNCTIONS

TIME - PRESICE TO THE SECOND

» The time inside the INFOBAR gets synchronized in various ways. Choose the most comfortable way for your environment.

The INFOBAR has a powerful watch, which is synchronizable like you want:

- **Slave Clock Line** - Synchronize the INFOBAR with your inhouse slave clock line (included).
- **NTP** - The INFOBAR is synchronizable with an adjustable NTP-server - DHCP required. (optional)
- **DCF-77** - Place an external DCF-77 receiver outside the INFOBAR for best reception results. (optional)
- **AirTime** - Synchronize the watch wireless with a receiver of an AirTime 868 MHz transmitter. (optional)
- **GPS** - Let the watch inside the INFOBAR synchronize via the Global Positioning System.
- **Manual** - Of course you can adjust the time manual

STOP WATCH - EASY USABLE


» The bright display shows the stop watch - viewable from every angle.

Two colorized buttons are available to control the stop watch. Simple and plain: green for start, red for stop and both for reset. The buttons could be placed right beside the keyboard to meet ergonomic aspects or at any other place in the wall.

ADDITIONAL INFOS

» Temperature and humidity are shown in the middle of the INFOBAR.

The digital combined sensor for temperature and humidity is placcable external where you need it. The sensor signal will be digital transmitted to the INFOBAR via RS 485 over Cat5 - absolutly loss-less.

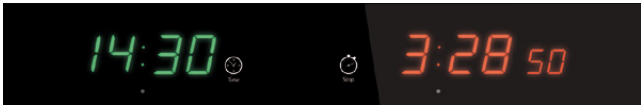


» INFOBAR 995 - Pic. 3 «

TECHNICAL SPECIFICATIONS

INFOBAR 1200

Application	Display of Time, Temperature, rel. Humidity, Stop Watch
Glas Protection	5 mm safety glass with silk print behind, perfect reflection elemiation by single surface micro etching
Temp./Hum. Sensor	High Quality combined digital sensor connected via RJ45 (RS485) to use network structure (one-to-one connection)
GPIO	Start (12V LED), Stop (12V LED), Reset (12V LED), Brightness Control (12V LED), Minute up (12V LED), Hour up (12V LED)
Buttons (for GPIO)	Illuminated Start and Stop buttons, also used reset the Stop watch and to adjust time and brightness, cable lenght 3 m
Power supply	12VDC by an OPERION system or external power supply 90-250 V, 50/60 Hz (can be placed inside the cabniet),
Power consumption	max. 25 W

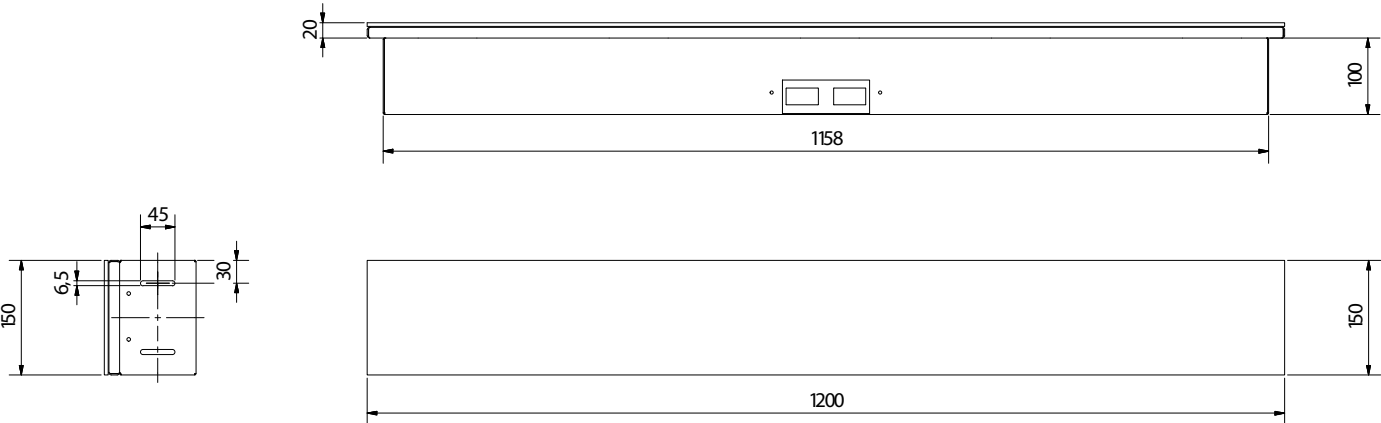

» INFOBAR technical drawing - Pic. 2 «



CUSTOMER AND MARKETS ALWAYS ON OUR MIND

» Europe has always been the
core market of Rein Medical.

The family business with its headquarter in
Germany, combines all the organisational
units under one roof.

Our sales and service teams in Germany,
Spain and Switzerland allows us to focus
on our customers and ensure customer
satisfaction.

Long term cooperation with our customers
is our top priority.



Germany

Rein Medical GmbH
Jakob-Krebs-Straße 124
47877 Willich

Phone +49 (0) 2156 / 49 49 0
Fax +49 (0) 2156 / 49 49 49

www.reinmedical.com
info@reinmedical.com

Switzerland

Rein Medical AG
Büfelderstrasse 1
CH-8370 Sirmach

Phone +41 (0) 71 / 929 55 99
Fax +41 (0) 71 / 929 55 90

www.reinmedical.com
info.ch@reinmedical.com

Spain

Rein Medical System, S.A.
C/ Téllez, 30 Posterior
1ª Planta, oficina 2-3
28007 Madrid

Phone +34 (0) 91 / 530 88 24
Fax +34 (0) 91 / 574 32 93

www.reinmedical.com
info.es@reinmedical.com