

MOUNTING REFERENCE GUIDE



DUAL DISPLAY MOUNT



CIM Cable Integrated Mounting System



HOW TO CREATE PART NUMBERS

Part numbers can be easily created by following the steps below:

Please replace the letters in **green** with the part no. code as per your requirements.

3. Specify where you want to mount the arm and select the fixing (Y):

1V	=	pole ø 23 - 40 mm/ 0.9 - 1.6"
1	=	pole ø 25 mm/ 1.0"
1F	=	pole ø 35 mm/ 1.4"
1C	=	pole ø 38 mm/ 1.5"
3	=	vertical rail
3DR	=	dual vertical rails, distance 150 mm/ 5.9"
3TX	=	dual vertical rails, distance 225 mm/ 8.9"
4V	=	vertical wall channel
8	=	lateral adapter to Trumpf klinoPORT ceiling pendant
81	=	lateral adapter to Trumpf ceiling pendant ML
82	=	lateral adapter to Trumpf klinoPORT frontal

4. Choose the colour requested for decorative parts (C):

gr	=	RAL 7024 (dark grey)
bl	=	RAL 5013 (blue)

5. Choose the colour requested for the aluminium die-cast parts (D):

1	=	RAL 9016 (pure white)
2	=	RAL 9002 (grey white)

EXAMPLE

1 Area of application		2 Arm version		3 Fixing		4 & 5 Colour	YOUR NOTES
S	-	U220G	-	Y	.	CD	Replace
S	-	U220G	-	4V	.	gr1	Example

DUAL DISPLAY COLUMN MOUNT SIDE BY SIDE

Configuration shown below consists of:

Horizontal channel with two flush mounts

Monitor adaption: VESA 75/ 100 with tilt/ swivel function

Maximum monitor weight: 16 kg/ 35.3 lbs on each side

Adapter for vertical wall channel

Part no. S-D908G-4V.**CD**

Table and floor column, height 500 mm/ 19.7"

Part no. Z-COL_500







DUAL DISPLAY COLUMN MOUNT SIDE BY SIDE

Technical data


Front view

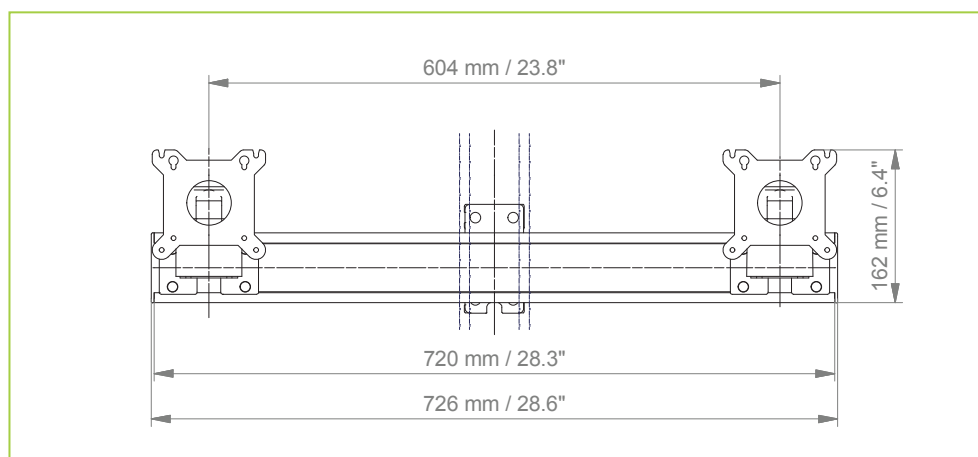

Top view

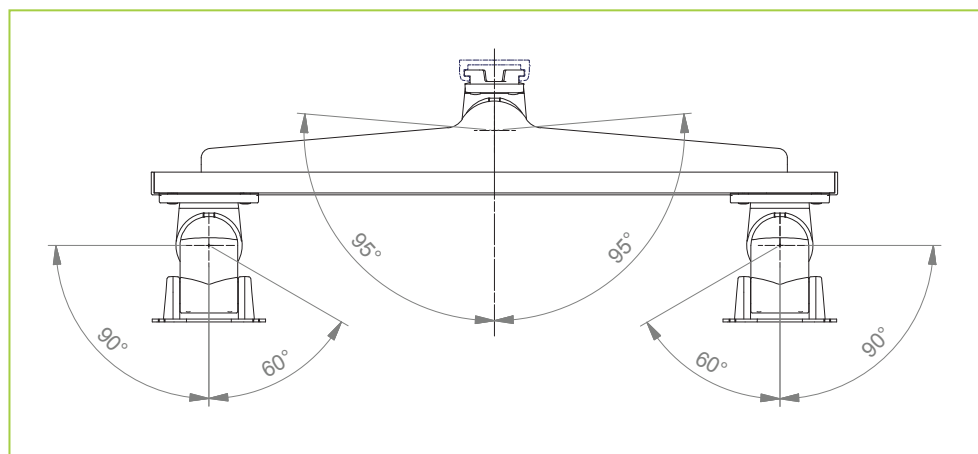

Side view

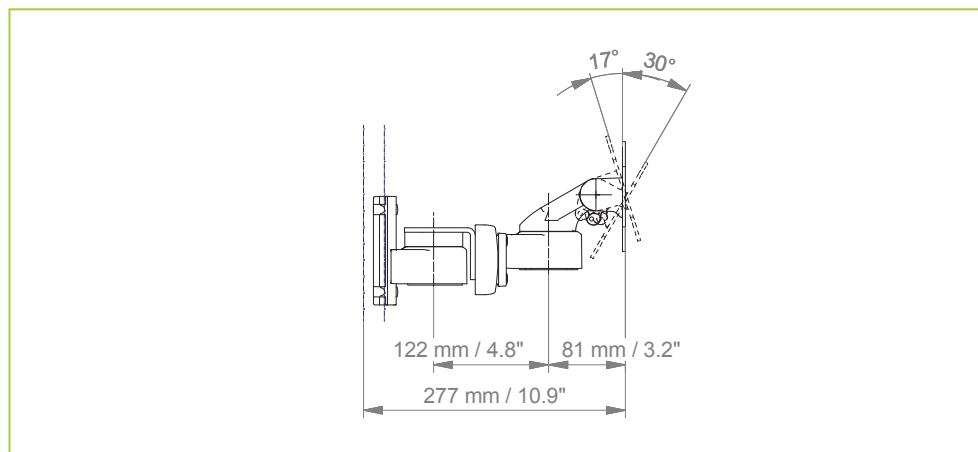



VERTICALLY STACKED DUAL DISPLAY MOUNT

Configuration shown below consists of:

Support arm pivot, arm length 195 mm/ 7.7"

Part no. S-U224G-**Y.CD**

Pole 550 mm/ 21.7" length, $\varnothing$ 25 mm/ 1.0" with two flush mounts

Monitor adaption: VESA 75/ 100 with tilt/ swivel function

Maximum monitor weight: 10 kg/ 22.1 lbs on each flush mount

Fixings: page 7





VERTICALLY STACKED DUAL DISPLAY MOUNT - FIXINGS



Illustration	Description	Notes	Part. no
	Adapter for vertical wall channel	H 115 mm/ 4.5" To mount to CIM wall channel (compatible with GCX channel) Please order separately: CIM wall channel, see catalogue accessoires	4V
	Vertical rail clamp	To mount to vertical European rail 10 x 25 mm	3
	Dual vertical rail clamp	To mount to two parallel vertical European rails 10 x 25, 8 x 35, 10 x 30, 10 x 50 mm Distance between rails 150 mm/ 5.9", e.g. Dräger pendant Distance between rails 225 mm/ 8.9", e.g. Trilux pendant	3DR 3TX
	Fixed pole clamp	To mount to pole $\varnothing$ 25 mm/ 1.0" To mount to pole $\varnothing$ 35 mm/ 1.4" To mount to pole $\varnothing$ 38 mm/ 1.5"	1 1F 1C
	Universal pole clamp	V-block to mount to pole $\varnothing$ 23 - 40 mm/ 0.9 - 1.6"	1V
	Lateral adapter	For Trumpf klinoPORT ceiling pendant For Trumpf ceiling pendant ML For Trumpf klinoPORT frontal	8 81 82